


### SHEET SECTION

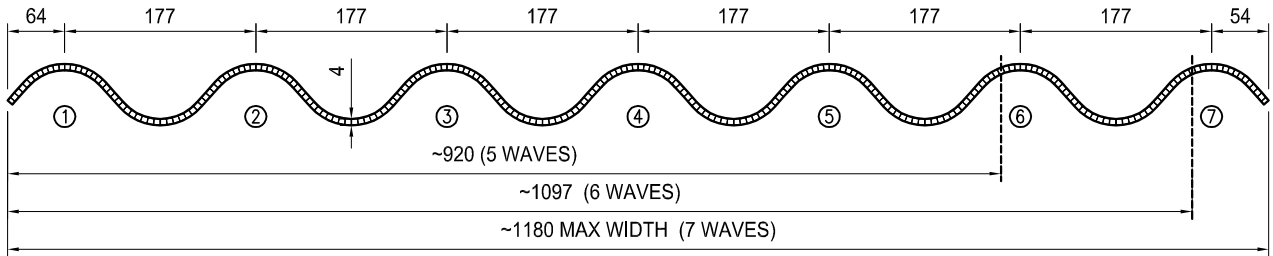


### APPLICATION

ASBESTOS CEMENT  
SHEET  
(ONDA PIU')

ONDA PIU'

ASBESTOS CEMENT  
SHEET  
(ONDA PIU')



### SPECIFICATION ITEMS

REALIZATION OF FLAT AND CURVED COVERINGS, R 3500 , WITH CORRUGATES SHEETS EXTRUDED IN CELLULAR POLYCARBONATE 4 mm . THICK,TWIN-WALL, WAVE PITCH EURO 177/51, MAX WIDTH ~1180 mm , EXTERNAL UV PROTECTION, CLASS 1 SELF-EXTINGUISHING.

THE FOLLOWING SHEET PITCHES ARE AVAILABLE :


- 5 WAVES pitch ~ 920 mm
- 6 WAVES pitch ~1097 mm
- 7 WAVES pitch ~1180 mm

### TECHNICAL CHARACTERISTICS


• THICKNESS	4 mm
• SHEET PITCH	mm ~1180 – mm ~1097 – mm ~920 ±5 mm
• SHEET LENGTHS	MANUFACTURED TO LENGTH
• COLOURS	SATINED CLEAR AND OPAL
• END CLOSURES	HEAT SEALED ENDS
• TECHNICAL DATA OF THE SHEETS	
	• EXTERNAL UV PROTECTION
	• SELF-EXTINGUISHING CLASS 1 ITALY
• THERMAL INSULATING PROPERTIES	K = 3,4 Kcal/mq <sup>h</sup> °C (W = 3,9 W/mqK)
• LIGHT TRANSMISSION PROPERTIES	CLEAR 83% ±2 – OPAL 75% ±2

• APPLICATION NOTES

FLAT SHEET



CURVED SHEET R~3500



**PIU**  
**Onda PIU**