


SHEET SECTION

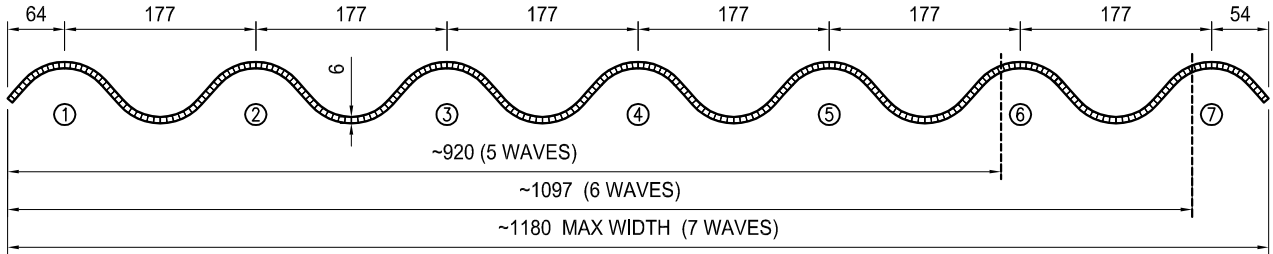


APPLICATION

ASBESTOS CEMENT
SHEET
(ONDA PIU')

ONDA PIU'

ASBESTOS CEMENT
SHEET
(ONDA PIU')



SPECIFICATION ITEMS

PRODUCTION OF FLAT AND CURVED COVERINGS, R 3500 , WITH CORRUGATES SHEETS EXTRUDED IN CELLULAR POLYCARBONATE 6 mm . THICK,TWIN-WALL, WAVE PITCH EURO 177/51, MAX WIDTH ~1180 mm , EXTERNAL UV PROTECTION, CLASS 1 SELF-EXTINGUISHING.

THE FOLLOWING SHEET PITCHES ARE AVAILABLE :

- 5 WAVES pitch ~ 920 mm
- 6 WAVES pitch ~1097 mm
- 7 WAVES pitch ~1180 mm

TECHNICAL CHARACTERISTICS


• THICKNESS	6 mm
• SHEET PITCH	mm ~1180 - mm ~1097 - mm ~920 ±5 mm
• SHEET LENGTHS	MANUFACTURED TO LENGTH
• COLOURS	SATINED CLEAR AND OPAL
• END CLOSURES	HEAT SEALED ENDS
• TECHNICAL DATA OF THE SHEETS	
	• EXTERNAL UV PROTECTION
	• SELF-EXTINGUISHING CLASS 1 ITALY
• THERMAL INSULATING PROPERTIES	K = 2,8 Kcal/mq ^h *C (W = 3,3 W/mqK)
• LIGHT TRANSMISSION PROPERTIES	CLEAR 75% ±2 - OPAL 65% ±2

• APPLICATION NOTES

FLAT SHEET



CURVED SHEET R~3500



PIU
Onda PIU