



SHEET SECTION

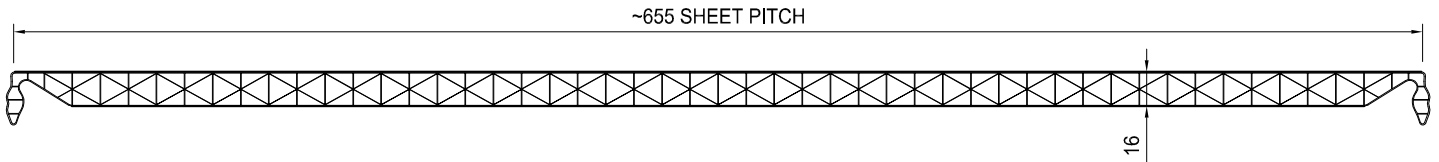

APPLICATION

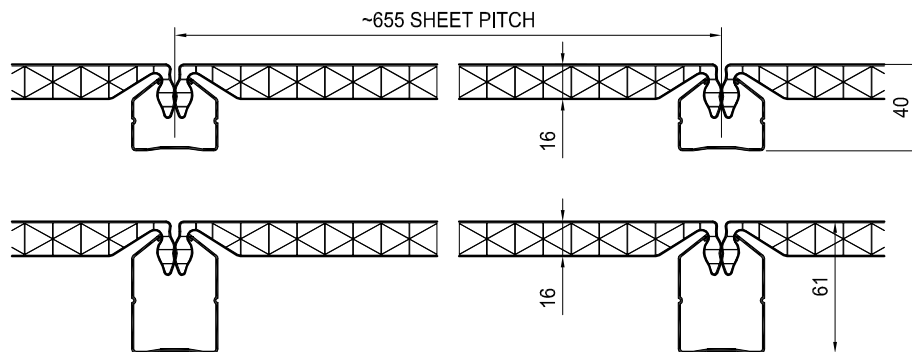


SPECIFICATION ITEMS

REALIZATION OF VERTICAL GLAZING, FLAT AND CURVED COVERINGS WITH CELLULAR POLYCARBONATE SHEETS WITH "X" AND U-SHAPED EXTRUDED STRUCTURE, THICKNESS 16 mm, MODULE OF ~655 mm, UV PROTECTED ON EXTERNAL SIDE. THE U-SHAPED SHEETS EXTRUSION ALLOWS IT TO BE SNAPPED ON TO OPEN-JOINT GALVANIZED AND PLASTIC COATED STEEL CHANNELS, CREATING AN EXCEPTIONAL SELF-SUPPORTING UNIT WITH PERFECT SURFACE PLANARITY . PERIMETER ALUMINIUM ANODIZED PROFILES AND OTHER FINISHING ACCESSORIES ASSURE A PERFECT SEALING OF THE SYSTEM .

• THICKNESS	16 mm
• SHEET PITCH	~655 mm
• SHEET LENGTHS	MANUFACTURED TO LENGTH
• COLOURS	SATINED CLEAR AND OPAL
• END CLOSURES	TAPED ENDS
• TECHNICAL DATA OF THE SHEETS	
	• NORMAL; EXTERNAL UV PROTECTION
	• SELF-EXTINGUISHING CLASS 1 ITALY
• THERMAL INSULATING PROPERTIES	$K = 1,9 \text{ Kcal/mqh}^{\circ}\text{C}$ ($W = 2,2 \text{ W/mqK}$)
• LIGHT TRANSMISSION PROPERTIES	CLEAR 70% - OPAL 45%

• APPLICATION NOTES

FLAT SHEET



CURVED SHEET $R \sim 3000 \text{ min}$

